

PRODUCT DESCRIPTION

- All aluminum alloy structure, fanless cooling design
- Support 1*M SATA slot, 1*2.5" HDD
- Support 2*HDMI + 1*DP, (synchronous/asynchronous triple display)
- 2x RTL8111H Gigabit LAN
- 1x COM (RS-232 only)


TECHNICAL SPECIFICATION

Model	AXBOX-IE302
Color	Metallic Gray
Material	All-aluminum alloy structure
Processor	Intel Pentium J3710 (4 Cores 4 Threads, 1.6 GHz, Turbo 2.64 GHz)
Chipset	Braswell
Memory	Support 1*DDR3L 1600 MHz SODIMM, Max 8GB
Display Card	Intel HD Graphics
Display Port	2*HDMI (4096 x 2160 @ 24Hz) 1*DP (4096 x 2160 @ 30Hz)
Front I/O	1*power switch, 2*USB3.0, 4*USB2.0, 1*COM (RS-232 only)
Back I/O	2*LAN, 1*Line-out / Mic 2 in 1, 2*HDMI, 1*DP, DC in 12V input
Expansion Slot	Support 1* Full-Length Mini PCIe slot (support PCIE & USB2.0 signal, 4G/WIFI/Bluetooth optional); Support internal Nano-SIM card slot
Network Port	2*RTL8111H Gigabit LAN
Storage	1*2.5" HDD slot, 1*Mini PCIe slot (support SATA)
Input Voltage	Support DC 12V input
Other Function	Auto power on when there is electricity, Timed startup, Wake on LAN, PXE boot, Watchdog (0~255 level) , TPM2.0 security encryption
Work Temp	-20°C ~ +50°C, Surface air flow
Work Humidity	5% ~ 95% non-condensing state
Certification	CE, ROHS, FCC, ISO9001
Dimension	142 * 126.5 * 42 mm
Weight	0.74 kg
Application Field	Industrial Automation, Medical, Logistics & Transportation, Warehousing, e-education and other fields.

APPLICABLE OS:



AXBOX-IE302

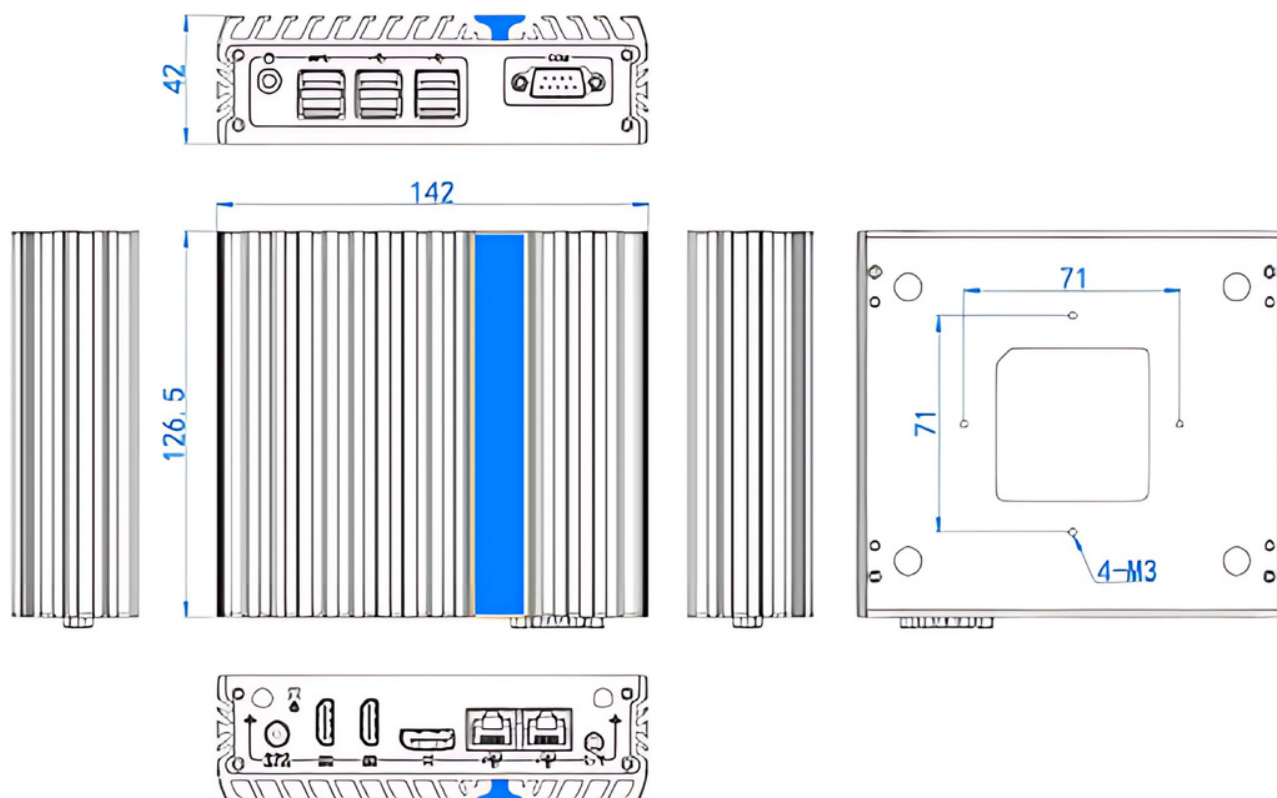

Packing list

Name	Quantity	Note
Power adapter	1	12V 3.3A / 12V 4A (optional)
Power cable	1	US, UK, EU, CN, etc
VESA mount	1	Standard

Config information

Config 1	AXBOX-IE302	Intel Pentium J3710, 2*LAN / 1*COM / 6*USB	Standard I/O
----------	-------------	--	--------------