

PRODUCT DESCRIPTION

- All-aluminum alloy structure, fanless cooling design
- 1*M.2 slot + 1*full height Mini PCIe slot (support SSD+WIFI/4G at same time)
- 2*HDMI + 1*VGA display port, Support synchronous and asynchronous triple display
- 2*RTL8111H Ethernet
- 4*COM (2*COM support RS232/485)

TECHNICAL SPECIFICATION


Model	AXBOX-IE342
Color	Metallic Gray
Material	All-aluminum alloy structure
Processor	Onboard Intel Celeron J6412 (Quad core quad threads, max Turbo 2.6 GHz)
Chipset	Elkhart Lake
Memory	Support 1*DDR4 3200 MHz SODIMM slot, max 32GB
Display Card	Intel(R) UHD Graphics (support synchronous and asynchronous triple display)
Display Port	2*HDMI (4096 x 2160 @ 60Hz) 1*VGA (1920 x 1080 @ 60Hz)
Front I/O	1*power switch, 4*USB3.0, 1*Line-out/Mic-in (Two in one audio), 4*COM (COM1/2 RS232/485 optional)
Back I/O	2*USB2.0, 2*LAN, 2*HDMI, 1*VGA, 1*DC 12V input
Expansion Slot	Support 1*Mini PCIe slot (PCIe & USB2.0 4G/WIFI/BT optional) , Nano-SIM slot external
Network Port	2*Intel RTL8111H 100/1000M Gigabit LAN
Storage	1*2.5" SSD slot 1*M.2 2280 M-key slot (support SATA & PCIe 3.0x1, NVMe)
Input Voltage	Support DC 12V input
Other Function	Auto power on when there is electricity, Network wake up, Timed startup, PXE boot, Watchdog (0~255 level) , TPM2.0
Work Temp	-20°C ~ +60°C, Surface air flow
Work Humidity	5% ~ 95% non-condensing state
Certifications	CCC, CE, ROHS, ISO9001
Dimension	186 * 127 * 66 mm
Weight	1.36 kg
Application Field	Industrial automation, medical, transportation, logistics, warehousing, e-education, etc



APPLICABLE OS:



AXBOX-IE342

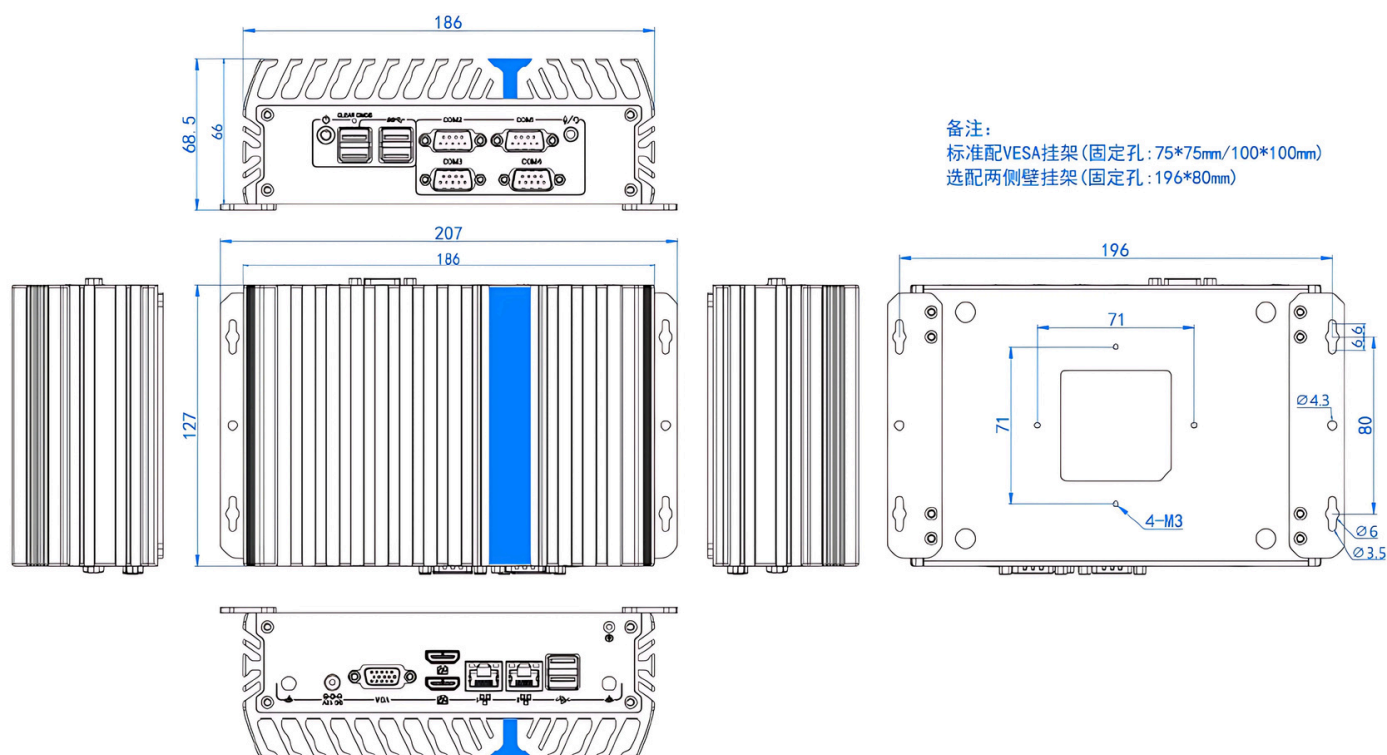

Packing list

Name	Quantity	Note
Power Adapter	1	12V 4A / 12V 5A input
Power cable	1	US, EU, UK, CN, etc (Optional)
Certificate of qualification	1	
Warranty card	1	
VESA mount	1	

Config information

Config 1 AXBOX-IE342 Intel Celeron J6412, 2*LAN / 4*COM / 6*USB Standard I/O