

PRODUCT DESCRIPTION

- Die cast aluminum alloy moulding, fanless design
- Onboard Intel Whiskey Lake U series processor
- Support 9V ~ 36V wide voltage Input, and TPM2.0 security encryption
- Support 2*RS232/422/485 COM, 6*COM Optional
- Support 2*Intel Ians, 4*Intel Ians Optional
- IP65 full flat front panel

TECHNICAL SPECIFICATION

Model	AXPPC-A116
Color	Titanium gray (Color can be customized)
Material	Aluminum alloy chassis
Processor	• Onboard Intel Celeron 4205U(Dual core dual threads,1.8Ghz,2MB Cache); • Onboard Intel Core i3-10110U (Dual core quad threads , 2.1Ghz , Max turbo 4.1Ghz, 4MB Cache) • Onboard Intel Core i5-8260U(Quad core eight threads,1.6Ghz,Max turbo 3.9Ghz,6MB Cache) • Onboard Intel Core i7-8565U(Quad core eight threads,1.8Ghz,Max turbo 4.6Ghz,8MB Cache)
RAM	Support 1*DDR4 2133/2400 SODIMM Memory Slot,Max. Support 32GB
BIOS	AMI UEFI BIOS
Display Chip	Integrated Intel UHD Graphics
Display Port	1*HDMI, 1*LVDS(Support synchronous and asynchronous dual display)
Storage	Onboard 1*M.2 2280 slot(SATA Protocol),1*2.5" HDD, Support RAID 0/1
Expansion Slot	Support 1*Mini PCIE slot(Support WIFI/Bluetooth/3G/4G Optional, embedded SIM slot)
I/O	1*HDMI,2*COM(COM1&COM2 RS232/RS422/RS485 Optional,6*COM Optional),1*Power Switch 1*2Pin power supply phoenix connector,1*Audio (Support Mic and Speaker at the same time),4*USB3.0,2*Intel 1000M LAN (4*LAN Optional)
Other Function	TPM2.0 security encryption、Auto power on when there is electricity、Timing boot、Wake on LAN、PXE boot、 Watchdog (0~255 level) (Standard version doesn't set these function)
Expansion Function	GPIO (8 Input 8 Output) 、 2*LAN、 4*COM、 2*USB2.0 (Standard version doesn't include these ports)
LCD	Size: 12.1 inch TFT-LCD;Brightness:350 cd/m2;Viewing Angle:Full Angle. Ratio:4:3;Resolution:1024 * 768;
Touch Screen	Industrial grade multi-touch capacitive touch screen. life Time: more than 50000 Thousand Times;
Speaker	Two 8-ohm 2-watt speaker
Input Voltage	DC 9V ~ 36V wide voltage Input, support positive pole and negative electrode connect reversely protection
Work Temp	0°C ~ +50°C (Commercial), -20°C ~ +60°C (Industrial SSD), Surface air flow
Work Humidity	5% ~ 95% non-condensing
Dimension	309.5 * 248 * 60 mm
Embedded Installation	298.5 * 237 mm
Weight	2.9 kg
Application	Industrial Automation,Medical,Logistics Transportation, Warehousing, Machine Vision, etc




APPLICABLE OS:



Distributed and Serviced by:
Edex Technology/ Axiomtek
Tel: 03-77731203
Website: www.myaxeon.com
Email : info@axiomtek.com.my

ITPC-A116 DRAWING

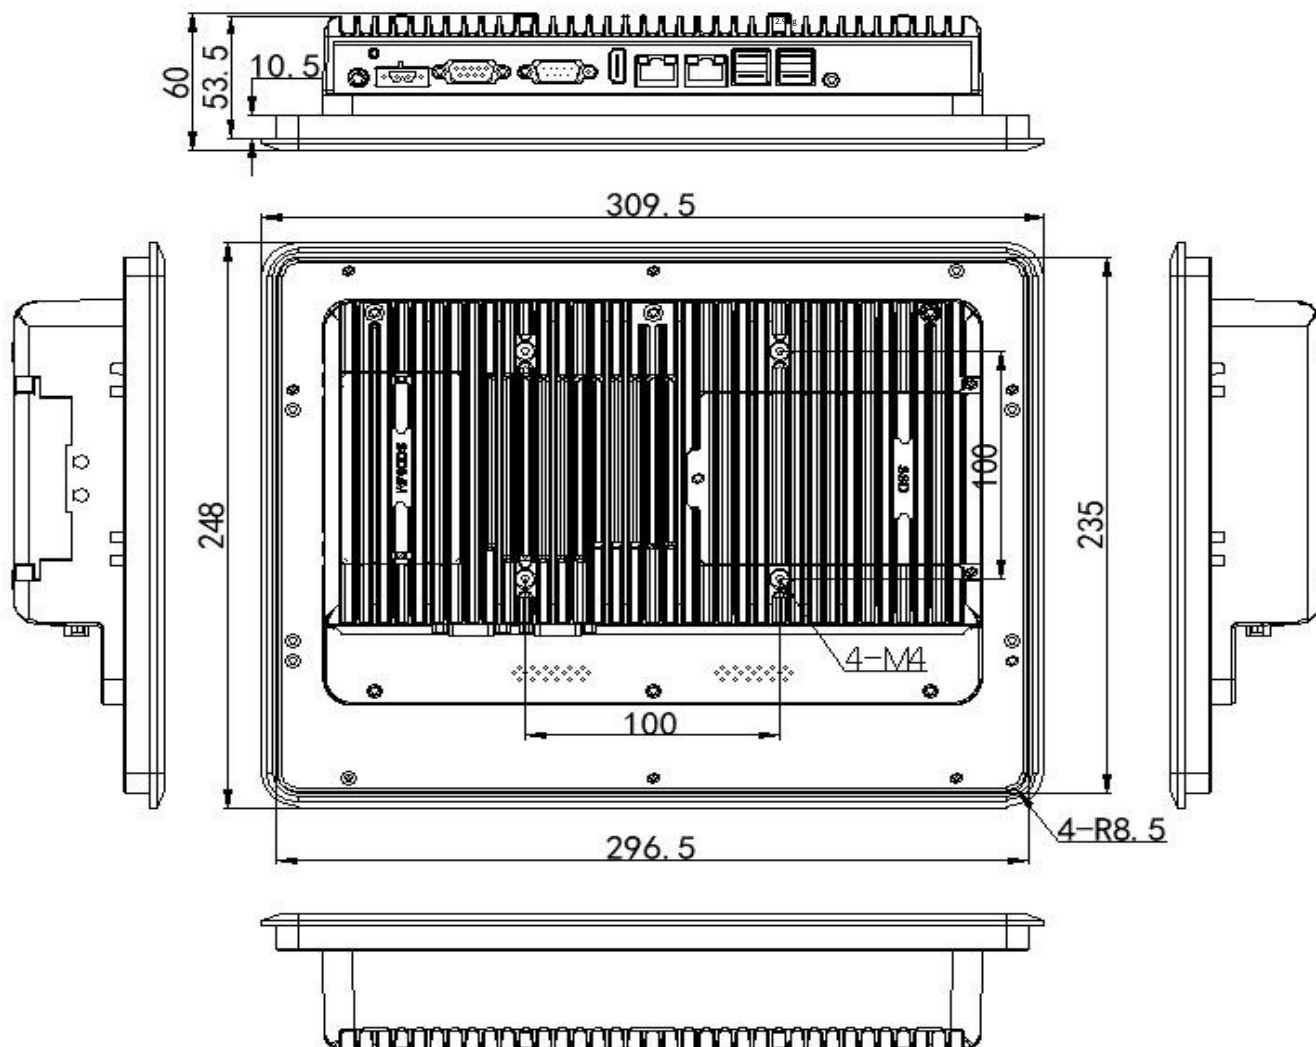

Order information

Configuration1	ITPC-A116	Intel Celeron 4205U	Standard Port
Configuration2		Intel Core i3-10110U	Standard Port
Configuration3		Intel Core i5-8260U	Standard Port
Configuration4		IntelCorei7-8565U	Standard Port

Remark: There is conflict between the expansion function ports' fixed position and the standard version ports' fixed position, so if you need some expansion function ports, please check with us first, thanks.

Accessories List

Name	Quantity	Specification
Power Adapter	1	12V5A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
Embedded Mounting Clip	4	For Standard Embedded Installation