


NA861

1U Rackmount Network Appliance Platform with LGA3647 Socket Intel® Xeon® Scalable Processor (Cascade Lake/Skylake), Intel® C621 (Purley) and up to 34 LAN

Features

- LGA3647 socket Intel® Xeon® Scalable processor
- 6 DDR4-2400 R-DIMM for up to 192GB of memory
- Max. up to thirty-four 10/100/1000 Mbps Ethernet ports
- 4 expandable LAN modules supporting 1GbE/10GbE/25GbE/40GbE/Fiber/Copper/Bypass
- Supports 1U redundant power supply
- Supports IPMI/TPM (onboard) for optional
- High computing power for SDN, NGFW, IDS, IPS and UTM applications

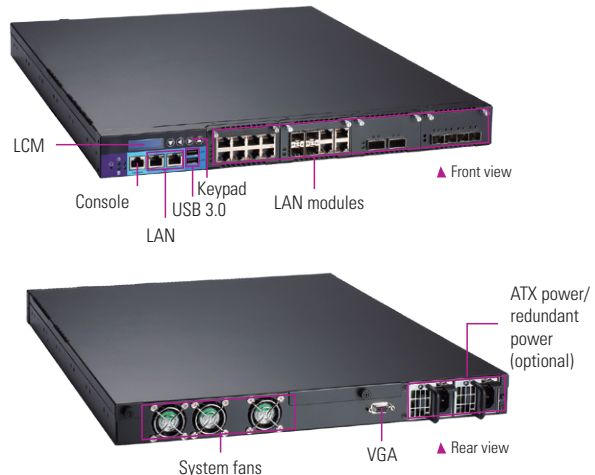

Specifications

System	
CPU	LGA3647 socket Intel® Xeon® Scalable processors (Cascade Lake/Skylake)
Chipset	Intel® C621
Memory	6 x DDR4-2400 R-DIMM, up to 192GB non-buffer non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 2.5" SATA HDD 1 x mSATA
Network Interface	2 x 10/100/1000 Mbps Ethernet (Intel® i210) Single CPU: 4 x LAN module (optional), max. up to 34 LAN ports
I/O	1 x RS-232 (RJ-type) 2 x USB 2.0 2 x RJ-45 1 x VGA
Other Features	LAN Bypass function through latch relay (depends on LAN modules)
Expansion Interface	N/A
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	400W 1U redundant power supply
OS Compatibility	Linux Kernel

Mechanical/ Environmental

Form Factor	1U rackmount
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temperature	0°C to +40°C (+32°F to +104°F)
Humidity	10% to 95% RH, non-condensing
Chassis Material	Steel
Dimensions	44 mm (1.73") (H) x 430 mm (16.92") (W) x 561 mm (22") (D)
Weight (net/gross)	8 kg (17.6 lb)/12 kg (26.4 lb)
Certifications	FCC class A/CE class A

Ordering Information

Standard	
NA861-R2GI-US with Redn power (P/N: E26E861100)	1U rackmount appliance with Intel® Xeon® Scalable processor, 2 GbE LAN and redundant power
NA861-R2GI-US with Single power (P/N: E26E861101)	1U rackmount appliance with single Intel® Xeon® Scalable processor, 2 GbE LAN and single power

Optional	
5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco

* Specifications and certifications may vary based on different requirements.

Packing List

- 1 x SATA cable
- 1 x Power cord

Dimensions

